


Number of contacts

8

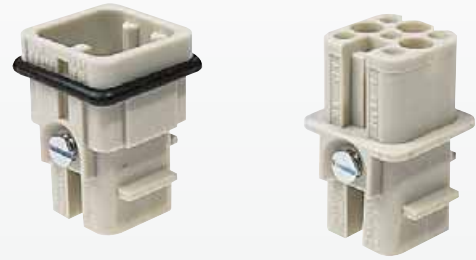

Inserts

Han D/DD

Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
<p>Crimp terminal Order Crimp contacts separately</p> <p>For thermoplastic and metal hoods/housings</p>	Han D®	09 36 008 3001	09 36 008 3101	<p>M</p> <p>F</p>	<p>Contact arrangement View from termination side</p>
<p>Coding system with loss of contact</p>		09 33 000 9915	<p>To avoid accidental incorrect mating of adjacent connectors a coding system is required. Coding is effected-by means of a code pin to be inserted into the selected chamber of the female insert. The opposite male contact should be omitted.</p>		

Identification	Wire gauge (mm²)	Part No.		Drawing	Dimensions in mm																					
		Male contacts	Female contacts																							
<p>Crimp contacts</p> <p>silver plated</p>	0.14-0.37 0.5 0.75 1.0 1.5 2.5	<p>09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106</p>	<p>09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206</p>																							
<p>gold plated</p>	0.14-0.37 0.5 0.75 1.0 1.5 2.5	<p>09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126</p>	<p>09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226</p>		<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>0.90 mm</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>1.10 mm</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>1.30 mm</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> <td>1.45 mm</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>1.75 mm</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>2.25 mm</td> </tr> </tbody> </table>	Wire gauge	ø	Stripping length	0.14-0.37 mm²	AWG 26-22	0.90 mm	0.5 mm²	AWG 20	1.10 mm	0.75 mm²	AWG 18	1.30 mm	1 mm²	AWG 18	1.45 mm	1.5 mm²	AWG 16	1.75 mm	2.5 mm²	AWG 14	2.25 mm
Wire gauge	ø	Stripping length																								
0.14-0.37 mm²	AWG 26-22	0.90 mm																								
0.5 mm²	AWG 20	1.10 mm																								
0.75 mm²	AWG 18	1.30 mm																								
1 mm²	AWG 18	1.45 mm																								
1.5 mm²	AWG 16	1.75 mm																								
2.5 mm²	AWG 14	2.25 mm																								
<p>FOC contacts for 1 mm plastic fibre</p>		20 10 001 3212	20 10 001 3222																							

Stock items in bold type