



NEOZED FUSE LINK 400V GL, SIZE D01,
10A IN FOLDING BOX

Similar to image

Technical data:

Color coding of the fuse link		red
Current / for AC / rated value	A	10
Size of the fallback-system / acc. to DIN EN 60269-1		D01
Supply voltage • for AC / rated value	V	400
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	50
Protection class IP		IP20, with connected conductors
Climatic class		Up to 45°C at 95 % rel. humidity
Ambient temperature • minimum	°C	-5
• maximum	°C	40

Certificates/approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
--------------------------	--	--	---------------------------	-------------------	--



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

other

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE2310/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SE2310

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

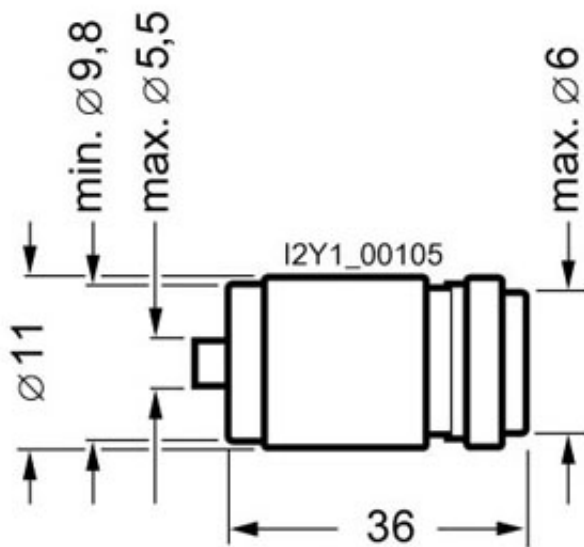

last change:

May 15, 2013