


## 76A/LR44

## Zinc/Manganese Dioxide Battery

	Dimensions	in mm	LR44
	$h_1/h_2$		5,4
		max.	
		min.	5,0
	$d_1$	max.	11,6
		min.	11,25
	$d_2$	min.	3,8
	$d_4$	min.	3,8
$\begin{vmatrix} (+) \\ -d_2 - \\ -d_1 - \\ \end{vmatrix}$	$h_1/h_2$		

SPECIFICATIONS		
Nominal Voltage	1.5 V	
Rated Capacity	120 mAh on 6.8 kΩ to 1.2V	
Average Weight	1.95 g (0.069 oz)	
Terminals	Flat	
Operating temperature range	-20°C to 54°C (-4°F to 130°F)	
NEDA/ANSI: IEC:	1166A LR44	

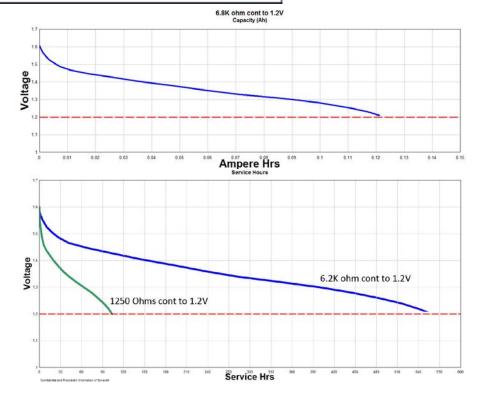

## **DURACELL**

Berkshire Corporate Park Bethel, CT. 06801 U.S.A. Telephone: Toll-free 1-800-544-5454 www.duracell.com Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.