


Systèmes de suspension montage mural


Support pour flanc 60



N	Ax B mm	Z.B.		H.D.		INOX 316		pc.
		Réf.	/pc.	Réf.	/pc.	Réf.	/pc.	
250	104x30	62021060	0,041	62031060	0,040	62061060	0,041	25


Noodzakelijk voor Reijband 60x60

Mini-support universel




N	Ax B mm	G.S.		H.D.		INOX 316		pc.
		Réf.	/pc.	Réf.	/pc.	Réf.	/pc.	
500	65x87	62026010	0,088	62036010	0,098	62066010	0,092	10

Distancieur



N	A mm	Z.B.		H.D.		INOX 316		pc.
		Réf.	/pc.	Réf.	/pc.	Réf.	/pc.	
1000	180	67030539	0,17	67030541	0,24	67060541	0,13	10
1000	350	67030540	0,32	67030542	0,35	67060542	0,21	10

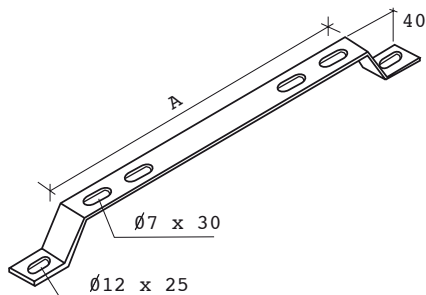

Matériel: acier
 Température d'emploi: -50°C / +150°C
 N = Charge admissible par support en Newton.



Poids en kg

Distancieur

E.Z. Zingage électrolytique EN 12329
Z.B. Zingage électrolytique, bichromaté EN 12329
G.S. Galvanisation sendzimir EN 10142
H.D. Galvanisation à chaud EN-ISO 1461
INOX Acier inoxydable AISI 304 ou AISI 316