


UC300 S24 4P PE Installation Cable	J-2Y(St)2Y 4x2x0.51 (AWG 24) 100Ω Data Cable ISO/IEC 11801 CAT-5e	FTP
--	---	------------

The right to alterations reserved

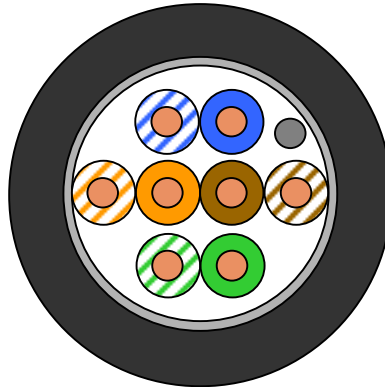

Application: Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
 IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
 IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards: EIA/TIA 568A;
 ISO/IEC 11801 2nd ed.; IEC 61156-5
 EN 50173; EN 50288-2-1

Construction

Conductor	bare copper wire Ø 0.51 mm (AWG24)
Insulation	Polyethylene, Ø 1.0 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core
Overall screen	Al-laminated plastic foil, Drain wire AWG26 tinned
Sheath	PE, black RAL 9005 DRAKA COMTEQ UC300 SCREEN 24 4P CATEGORY 5E FTP IEC 61156-5 PE {METERMARKING AND BATCHNUMBER}.

Technical Data

Product code	Designation	Brand name	Outer diameter Mm	Weight kg/km	Copper content kg/km	Tensile force N
CD7675151	J-2Y(St)2Y 4x2x0.51	UC300 S24 4P PE	7.8	54	19.8	80

UC300 S24 4P PE	J-2Y(St)2Y 4x2x0.51 (AWG 24)	FTP
Installation Cable	100Ω Data Cable ISO/IEC 11801 CAT-5e	

The right to alterations reserved

Mechanical Properties

Bending radius	≥ 25 mm without load ≥ 50 mm with load
Temperature range,	during operation -20°C up to + 60°C during installation 0°C up to + 50°C

Electrical Properties (at 20°C ± 5°C)

DC loop resistance	≤ 190 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 2000 MΩ *km
Capacitance at 800 Hz	nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Characteristic impedance (1-100 MHz)	(100 ± 15) Ω
Nominal velocity of propagation	approx. 67 %
Propagation delay	≤ 535 ns/100m
Delay skew	≤ 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core and Core/Screen	
Transfer impedance	at 1 MHz ≤ 50 mΩ /m at 10 MHz ≤ 100 mΩ /m at 30 MHz ≤ 200 mΩ /m

Nominal transmission characteristics acc. to Category 5e (at 20 °C)

f (MHz)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1	1,9	71	68	69,1	66,1	68	65	20
4	3,7	62	59	58,3	55,3	56	53	23
10	6	56	53	50	47,0	48	45	25
16	7,6	53	50	45,4	42,4	44	41	25
20	8,5	51	48	42,5	39,5	42	39	25
31,2	10,7	49	46	38,3	35,3	38	35	24
62,5	15,7	44	41	28,3	25,3	32	29	22
100	19,8	41	38	21,2	18,2	28	25	20
125	22,3	40	37	17,7	14,7	26	23	19
155,5	24,2	38	35	13,8	10,8	24	21	
175	25,7	37	34	11,3	8,3	23	20	
200	27,5	36	33	8,5	5,5	22	19	
250	29,2	35	32	5,8	2,8	20	17	
300	32,0	34	31	2,0	-1,0	16	13	