



## Relais temporisé multifonctions



Powering Business Worldwide™

Référence

ETR2-69

Code

262689

### Gamme de livraison

Gamme			Relais temporisé ETR2, 17,5 mm de largeur
Fonction de base			Relais temporisé
Fonction			Multifonctions Retardé à l'appel Retardé à la chute Impulsion à l'appel Impulsion à la chute Clignotement mise en forme d'une impulsion
			1 contact O-F
Courant assigné d'emploi en AC-15			
230 V (Contact à fermeture)	$I_e$	A	3
230 V (contact à ouverture)	$I_e$	A	3
Courant thermique conventionnel	$I_{th}$	A	6
Plage de temporisation			0,05 s – 100 h
Plage de tension	$U_{LN}$	V	24 – 240 V AC, 50/60 Hz 24 - 48 V DC
Repérage des bornes selon EN 50042			
Repérage des bornes selon EN 50042			

### Approbationen

Agrément UL	Yes
Homologation CSA	Yes
Product Standards	IEC/EN 61812-1; IEC/EN 60947-5-1; UL 508; CSA-22.2 No. 14-05; CE marking
UL File No.	E29184
UL CCN	NKCR, NKCR7
CSA File No.	UL report valid
CSA Class No.	3211-03
Homologation NA	UL listed, certified by UL for use in Canada
Degré de protection	IEC: IP20, UL/CSA Type: -

### Caractéristiques techniques dans le Catalogue en ligne

Autres caractéristiques techniques (catalogue à feuilletter)			Relais temporisé
--	--	--	------------------

### Technische Daten nach ETIM 4.0


Number of outputs, delayed, N/O			0
Remote access possible			No
Number of outputs, non-delayed, N/O			0
Function off-delayed			YES
Outputs, reversible delayed/non-delayed			YES
Type of electric connection			Screw connection
Number of outputs, non-delayed, N/C			0
Rated control voltage $U_s$ at DC		V	240
Clock function, starting with pulse, variable			No
Voltage type for actuation			AC/DC
Function flashing, starting with pulse, fixed time			YES
Function pulse shaping			YES
Rated control voltage $U_s$ at AC 50HZ		V	240

Time range		s	360000
Number of outputs, non-delayed, change-over contact			0
With semi-conductor output			No
Suitable only for remote control			No
Function flashing starting with pause, fixed time			YES
Plug-in type on auxiliary contact block			No
Width		mm	18
With plug-in socket			No
Function fleeting contact on energization			YES
Function star/delta			No
Rated control voltage Us at AC 60HZ		V	240
Function fleeting contact on de-energization			YES
Function on-delayed			YES
Height		mm	70
Depth		mm	63
Function cyclic starting with pause, variable			No
Number of outputs, delayed, N/C			0
Number of outputs, delayed, changeover contact			1

## Courbes caractéristiques

Repérage des bornes  
Fonctions chronométriques  
Courbes de limites de charge

## Encombrements

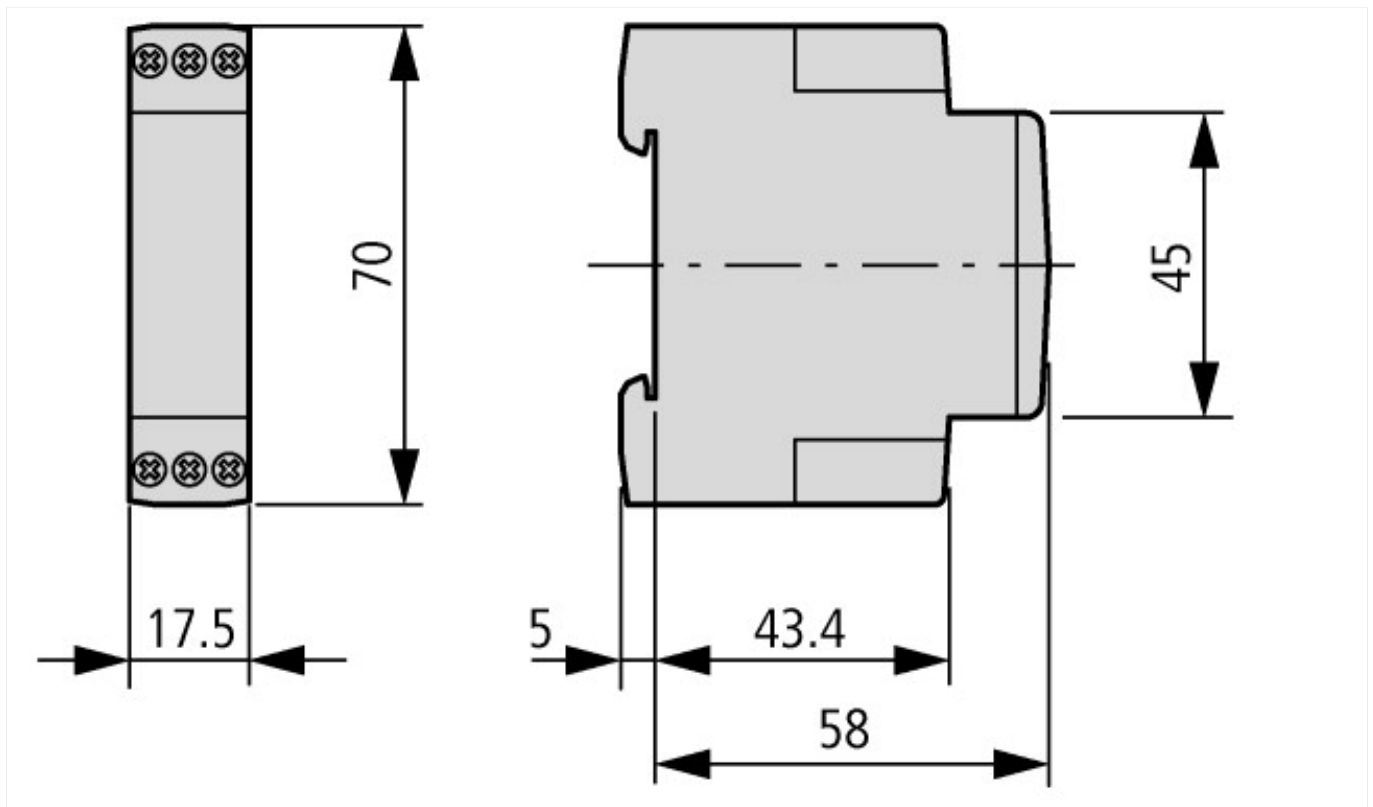

## Plus d'informations sur les produits (liens)

AWA2527-2372 (IL04910005Z) Relais électronique temporisé

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/23721008.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/23721008.pdf)

Etude