

Motion detector

# IS D360

EAN 4007841 601317

**STEINEL**<sup>®</sup>  
PROFESSIONAL



infrared sensor  
360°



max. 8 m

1000w

1000 W max.



IP20



2 - 2000 lux



5 sec - 20 min



ideal 2,5 m



energy saving

5 JAHRE  
HERSTELLER  
GARANTIE

manufacturer's  
warranty  
steinel-professional.de/garantie



CE

## Function description

The compact class. Recessed ceiling motion detector IS D360 for indoors, ideal for mounting in any standardized spot bezel, installation height up to 2.5 m, in the size of a bulb (e.g. GU10), 360° angle of coverage, max. reach 8 m (tangential), floating contact 50-250 volts.

## Technical specifications

Type	Motion detectors
Dimensions (Ø x H)	82 x 83 mm
Mains power supply	230 – 240 V / 50 Hz
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	corridor / aisle, function room / ancillary room, WC / washroom, indoors
Installation site	ceiling
Type of installation	Concealed wiring
Switching zones	720 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,50 – 4,00 m
Optimum mounting height	2,5 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Reach, radial	Ø 8 m (50 m <sup>2</sup> )
Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Time setting	5 s – 20 Min.
Switching output 1, resistive	1000 W
Constant-lighting control	No
Basic light level function	No
With remote control	No
Interconnection	Yes
IP rating	IP20
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
PU1, EAN	4007841601317

<https://www.steinell.de>


Motion detector

# IS D360

EAN 4007841 601317

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Detection Zone

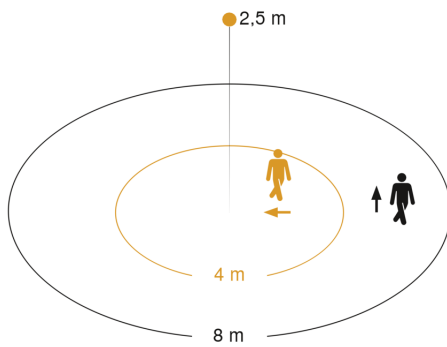

Mögliche Montagehöhe: 2,50 m – 4,00 m  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

