


Technical data sheet for:

SmartTube with Endstop

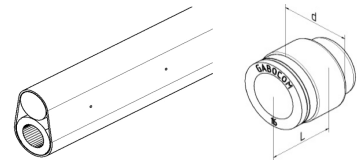

General data

Description	Perforated speedpipe-bundle tc (tight covered) for direct bury, filled with 1 piece of speedpipe-ground 10x2,0 and a copper cable 2x2x0,60
Production length on spool (600x356mm)	150m
Weight	Approx. 0,12 kg/m
Total weight	Approx. 25 kg (inc. spool)
Min. bending radius	1,0m
Max. Pull strength	600N
Description (Endstop)	The Endstop is used for closing of speedpipes. It is gas- and water-tight up to 0,5 bar, resistant to tensile and easy to install.
Package unit (Endstop)	25 Pcs.

Technical data

Quality	Value	Unit
Outer coat		
Material	PolyEthylen PE	
Colour	Orange	
speedpipe-ground 10x2,0		
Dimension	$D = 10,0^{+0,1}; s = 2,0^{+0,1}$	mm
Colour of stripes	Pink with black; opposite transparant windows	
Pressure nominal	Based on wall thickness bigger PN 16	
Inner surface	35 optimized sliding ribs	
Burst pressure	min. 60	
Max. Pull strength	300 bar at 20°C	
Copper cable 2x2x0,6		
Dimension	2 pairs copper cable	
Endstop ES 10		
Material	PolyOxyMethylen POM	
Inside diameter	Ø10	mm
Dimension	$D = 18; L = 22$	
Burst pressure	min. 30	bar
Tensile strenght	min 400	N