

# "Green" Power supply 5VDC 4A for Smart Media modules- 4 outputs - DIN-rail mountable



## ABI-PS1001S14

- ✓ High performance power supply (efficiency > 78%)
- ✓ 4-plug output cord to power 4 Smart Media modules
- ✓ Easy mounting with bracket, does not consume DIN-rail space
- ✓ Low stand-by consumption (<0,3Watt)



5VDC-4A power supply with a daisy-chain 4-plug output power cord. The cord length between successive plugs is approximately 40cm, in order to be able to reach modules situated far away from each other in a cabinet.

The power supply has a male IEC C14 mains input and comes with a IEC C13 to EURO (pin earth) cord.

The power supply can easily be mounted in the cabinet by sliding the included mounting bracket into the suited slot at the bottom of the abitana DIN-rail connectors.

### CHARACTERISTICS

- Switchmode power supply
- Input 90-264VAC, max 1000mA, 47/63Hz
- Output 5VDC, max 4000mA
- Output by 4 connectors in daisy chain
- Supplied with mounting bracket, mains lead
- WxHxD (mm): 90x32x46
- Net weight: 365g


#### Complies with:

- UL, CSA, CE, TÜV
- EN5022 Class B, Emission
- EN55022, EN550024, Safety
- IEC61000-4-2, IEC61000-4-3, Safety
- IEC61000-4-4, IEC61000-4-5, Safety
- Applicable directives : 89/336/EEC; 92/31/EEC; 73/23/EEC LVD

#### Required for:

- ABI-EV2000S00
- ABI-EV2008S00
- ABI-EV2012S00
- ABI-EV1012S00
- ABI-EV1001S00
- ABI-EV1017S00
- ABI-EL1001S00
- ABI-EL2002S00
- ABI-EL3008S00

### BLOCK DIAGRAM

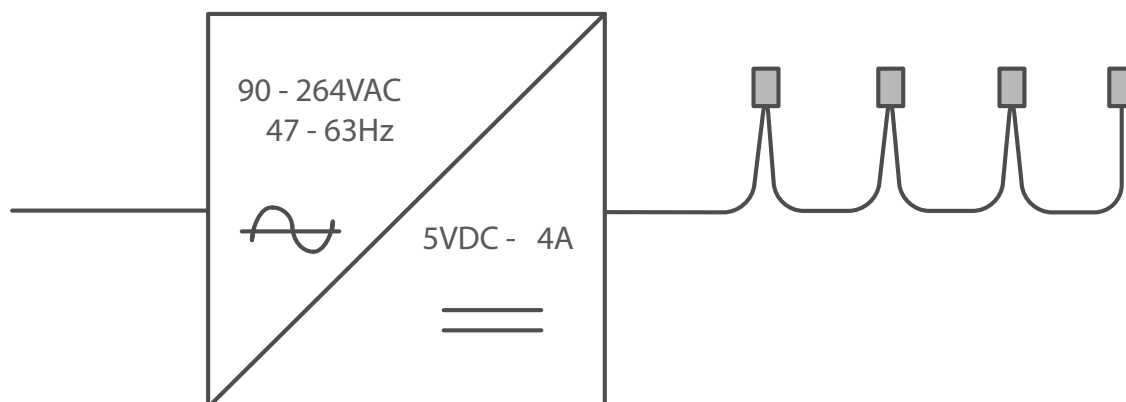

© abitana 05/2014 - ABI-PS1001S14\_datasteel\_EN

Specifications are subject to change without notice.