



WEVER & DUCRÉ
LIGHTING

BOX WALL mini 2.0

301120W0

Project	
Type	
Notes	
Quantity	
Date	

GENERAL

Wall
Surface
Signal White
IP20
Interior
Indirect 420 ^a to 425 ^b lm
Direct 420 ^a to 425 ^b lm
Total 840 ^a to 850 ^b lm
RAL 9003 ^c

LED

Lamp 2 x PAR16
PAR16
Socket GU10
max. 12 W
CRI ≥ 80


PHYSICAL

Length 67 mm
Width 67 mm
Height 200 mm
0.44 kg


ELECTRICAL

100 - 240 V
Total connected power 13.2 ^b to 13.3 ^a W
Class 1
Safety distance 0.3 m


^a LED 3000K CRI 80 white
^b LED 2700K CRI 80 white
^c Color may deviate slightly due to production conditions.

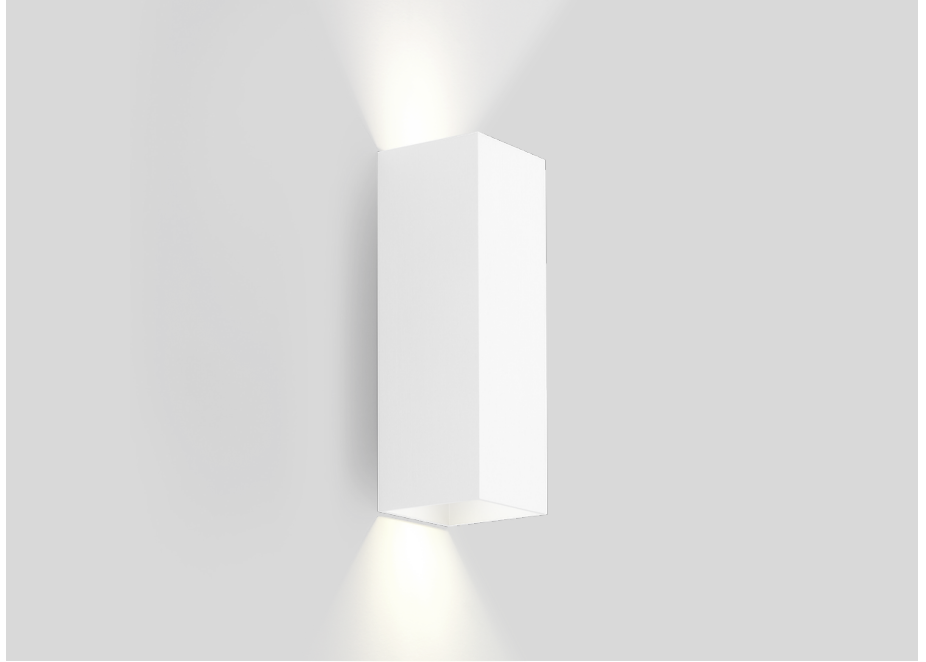

Squared wall surface mounted luminaire made from aluminium; surface Signal White; powder coated; matt texture; RAL 9003; direct/indirect light distribution; lamp socket GU10; lamp type PAR16; 2x max. 12W; 100 - 240 V; lamp not included; degree of protection IP20; PCI;



LIGHT DISTRIBUTION



[301120W0] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

BOX WALL mini 2.0

301120W0

LAMPS

PAR16 LED Lamp

TYPE	COLOUR	Ø·H (MM)	ORDERCODE
2700K >90 CRI GU10	Black	∅50·58	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Black	∅50·58	9 0 1 2 2 8 B 5
2700K >90 CRI GU10	White	∅50·58	9 0 1 2 2 8 W 3
3000K >90 CRI GU10	White	∅50·58	9 0 1 2 2 8 W 5
2700K >80 CRI GU10	Silver	∅50·52	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Silver	∅50·52	9 0 5 2 2 7 S 4