



WEVER & DUCRÉ
LIGHTING

VENN 2.0

149284B4

Project

Type

Notes

Quantity

Date

GENERAL

Wall

Surface

Jet Black

IP20

Interior

Total 3140 lm

RAL 9005^a

LED

3000 K

3-step binning

PHYSICAL

Length 724 mm

Width 724 mm

Height 90 mm

2.5 kg

ELECTRICAL

phase-cut dim



220 - 240 V

Total connected power 47 W


Class 1

Safety distance 0.3 m

^a Color may deviate slightly due to production conditions.

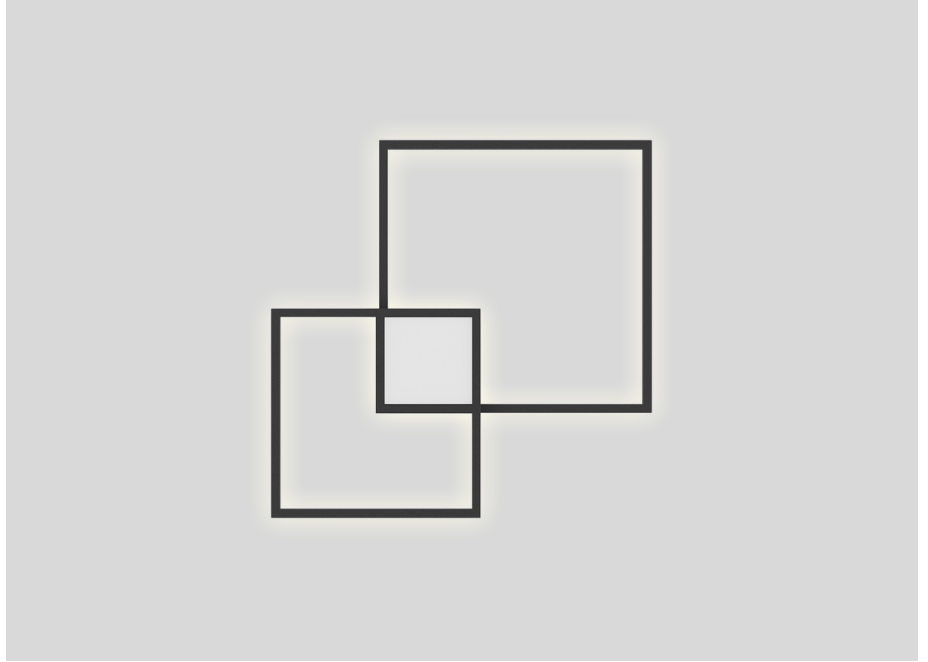

Squared ceiling/wall surface luminaire made from aluminium; surface Jet Black; powder coated; matt texture; RAL 9005; direct/indirect light distribution; phase-cut dim; light colour 3000 K; binning initial MacAdam 3 SDCM; CRI 80; 220 - 240 V; degree of protection IP20; PC1; lamp not included; light source replaceable by an authorized professional; control gear replaceable by end-user;





WEVER & DUCRÉ
LIGHTING

VENN 2.0

149284B4

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.97	0.93	0.89	0.86	0.82
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.