



WEVER & DUCRÉ
LIGHTING

TRAIN WALL OUTDOOR 2.0

718968B5

Project _____

Type _____

Notes _____

Quantity _____

Date _____

GENERAL

Wall _____

Surface _____

Jet Black _____

IP65 _____

Exterior _____

Total 510 lm _____

RAL 9005 ^a _____

LED

3000 K _____

3-step binning _____

PHYSICAL

Length 50 mm _____

Width 50 mm _____

Height 120 mm _____

0.35 kg _____

ELECTRICAL

phase-cut dim _____




220 - 240 V _____

Total connected power 8 W _____

Class 1 _____

Safety distance 0.3 m _____

^a Color may deviate slightly due to production conditions.

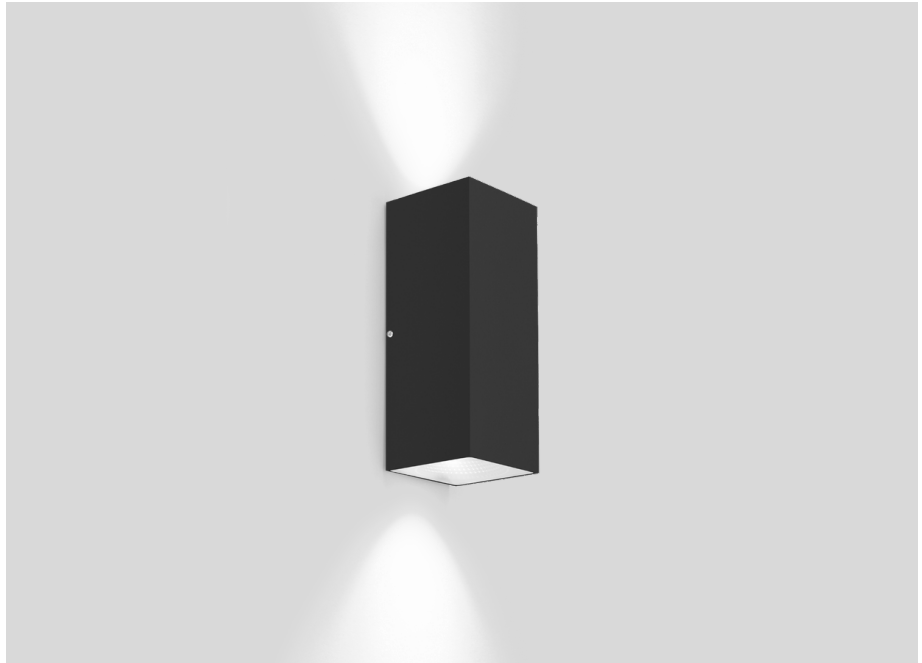



WEVER & DUCRÉ
LIGHTING

TRAIN

WALL OUTDOOR 2.0

718968B5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.95	0.9	0.84	0.79	0.75
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.