



WEVER & DUCRÉ
LIGHTING

BOX WALL 2.0 LED

341148W3

Project _____

Type _____

Notes _____

Quantity _____

Date _____

GENERAL

Wall _____

Surface _____

Signal White _____

IP20 _____

Interior _____

Total 880 lm _____

RAL 9003^a _____

LED

2700 K _____

3-step binning _____

PHYSICAL

Length 100 mm _____

Width 100 mm _____

Height 100 mm _____

0.67 kg _____

ELECTRICAL

phase-cut dim _____



220 - 240 V _____

Total connected power 10 W _____


Class 1 _____

Safety distance 0.3 m _____

^a Color may deviate slightly due to production conditions.

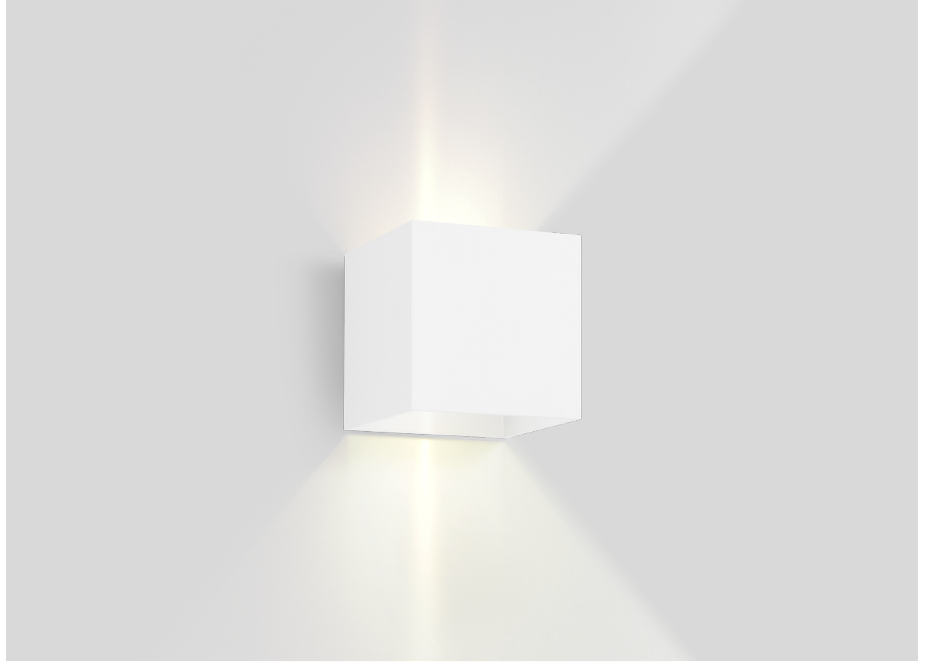

Squared wall surface mounted luminaire made from aluminium; surface Signal White; powder coated; matt texture; RAL 9003; direct/indirect light distribution; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam 3 SDCM; CRI 90; 220 - 240 V; degree of protection IP20; PC1; inclusive flaps for adjustable beam angle; light source replaceable by an authorized professional;





WEVER & DUCRÉ
LIGHTING

BOX WALL 2.0 LED

341148W3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.