

# LANmark Zone Distribution Boxes

## LANmark ZD box 6 Snap-In White

**Aginode Ref.:** N521.606

- For use as consolidation point.
- Compatible with all LANmark snap-in connectors.
- 6 numbered snap-in ports with shutters.
- Cable entry from the back.
- Cable fixing features
- Supplied with earthing screw
- Multiple mounting facilities

## DESCRIPTION

### Application

Designed for use as consolidation points, zone distribution boxes significantly improve the flexibility of desk locations in open office environments. They are particularly useful in offices where frequent relocation of outlets in the work area is required.

### Design

This ZD box has 6 numbered ports with shutters and can accommodate all LANmark snap-in connectors.

The box provides cable entry from the back and offers tie-wrap strain relief. It is supplied with a self-adhesive foam strip for protection against dust entry.

The ZD box is supplied as standard in white. A black version is available on request.

### Installation

The box is easy to install on walls, under raised floors or in ceiling voids, due to its multiple mounting features, including standard European 45 x 45 mm grid dimensions.

It is equipped with an earthing point and with fasteners to fix the lid to the base.



# LANmark Zone Distribution Boxes

LANmark ZD box 6 Snap-In White

## CHARACTERISTICS

### Construction characteristics

Colour	White RAL 9002
Material	Steel


### Dimensional characteristics

Approximate weight per piece	0.45 kg
Depth	125 mm
Height	42 mm
Width	120 mm

### Usage characteristics

Field of application	Fixed installations
Number of ports	6
Packaging	-

## DIMENSIONS 6 PORT ZD BOX

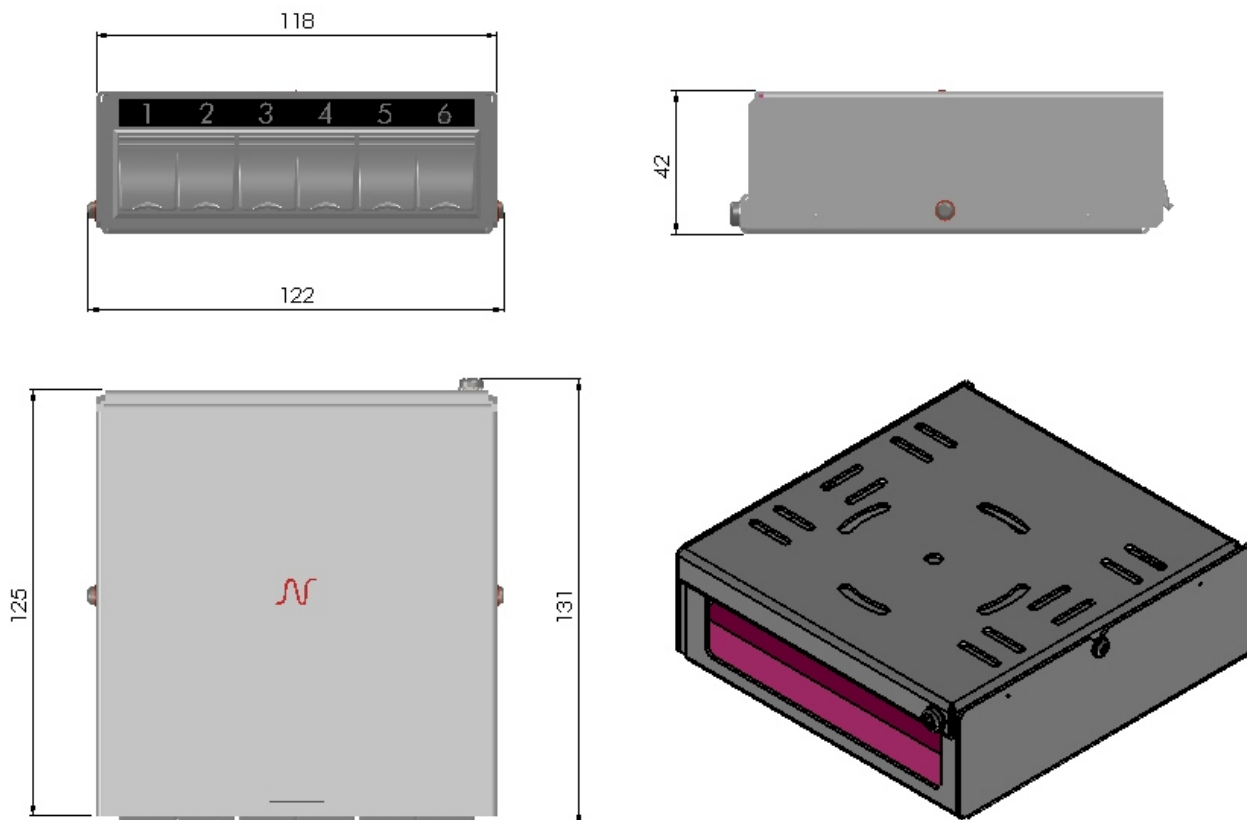

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Generated 15/03/2024 [www.aginode.net](http://www.aginode.net) Page 2 / 2