

QUICK MOUNT F CONNECTOR



FM-RG11-CX3 10.5

Article number 695020531

PRODUCT CATEGORY: 20

STATUS: AVAILABLE



Product

QUICK MOUNT F CONNECTOR
FM-RG11-CX3 10.5

Compression F connector that can be used on all RG11 and COAX 6 cables such as KOKA PE TRI 11 and KOKA TRI 11 B2ca

Properties



Certificates



Included

- 25 pieces QUICK MOUNT F CONNECTOR
FM-RG11-CX3 10.5
Article number 69502531

Tools

N/A

Instruction video

[www.hirschmann-multimedia.net/
montagefilm](http://www.hirschmann-multimedia.net/montagefilm)

Instruction card

www.install-your-catv.net

Mechanical Specifications

Dimensions hxxxd
46x15x15 mm

Weight
0.026 kg

PRODUCTSHEET

FM-RG11-CX 3 10.5


QUICK MOUNT F CONNECTOR

Specifications

Quick mount F connector.

Frequency range	5-3000 MHz	
Shielding effectiveness	30-1006 MHz	> 105 dB
	1006-2000 MHz	> 95 dB
	2000-3000 MHz	> 85 dB
Return Loss (0-1000 MHz)	> 30 dB	IEC 61169-1
Impedance	75 Ohm	
Transfer impedance	5-30 MHz	2.5 mOhm/m

Wiring diagram

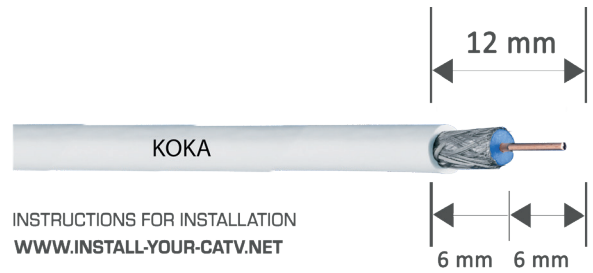

DO NOT FOLD BACK THE BRAID

Related product - KOKA TRI 11 B2ca/500 m

Article number 298799719



Contact

📍 Pampuslaan 170
1382 JS WEESP

✉ info@hirschmann.nl

☎ NL 31 (0)294 46 25 55
BE 32 (0)2 46 13 095

🌐 www.linkedin.com/company/hirschmann-multimedia

📘 www.facebook.com/hirschmann.multimedia

📺 www.youtube.com/HirschmannMultimedia

Hirschmann Multimedia B.V.

Hirschmann Multimedia B.V. is an international knowledge company and manufacturer, located in Weesp - The Netherlands. Hirschmann Multimedia focusses on leading the market by being innovative, flexible and renewing.

Hirschmann Multimedia Products (HMP):

Serving the retail and installer market, Hirschmann Multimedia Products is expanding from The Netherlands and Belgium towards 16 other European countries as of 2014. Through a qualified and selected dealer and installer network, HMP provides in products for COAX, IP and satellite systems.

Productsheet FM-RG11-CX3 10.5 Article number 695020531

Version 08.2018-1.0

Page 2 / 2