

specifications

Category 6/Class E eight-position jack module shall terminate unshielded twisted 4 pair, 22 – 26 AWG, 100 ohm cable and shall not require the use of a punchdown tool. Jack module shall use forward motion termination to optimize performance by maintaining cable pair geometry and eliminating conductor untwist. The white termination cap shall be color coded for T568A and T568B wiring schemes.



technical information

Category 6/Class E channel performance:	Exceeds all TIA/EIA-568-B.2-1 Category 6 and ISO 11801 2nd Edition Class E channel standard requirements at swept frequencies up to 250 MHz
Category 6/Class E component performance:	Exceeds all TIA/EIA-568-B.2 Category 6 and ISO 11801 2nd Edition Class E component standard requirements at swept frequencies up to 250 MHz
FCC compliance:	Meets FCC Part 68 Subpart F; contacts plated with 50 microinches of gold
IEC compliance:	Meets IEC 60603-7

key features and benefits

100% performance tested	Confidence that each jack module will deliver the critical electrical performance requirements
Utilizes enhanced GIGA-TX[™] technology	Optimizes performance by eliminating conductor untwist; reduces installation expense
Improved termination cap	Conductor retention slots simplify termination
Modularity	Jack modules snap in and out of <i>MINI-COM[®]</i> faceplates, modular patch panels and surface mount boxes for fast moves, adds and changes
True strain relief	Controls cable bend radius for long term installed performance
Individual serialized	Jack modules can be quality traced to sub-components
Industry standard RJ45 interface	Familiar to end-users; backwards compatible

applications

MINI-COM[®] TX6[™] PLUS Jack Module is a component of the *TX6500[™]* and *TX6000[™]* Copper Cabling Systems. Interoperable and backward compatible, these end-to-end systems provide design flexibility to protect network investments well into the future. With certified performance to the TIA/EIA-568-B.2-1 Category 6 and ISO 11801 Class E standards, these systems are ideal for today's high performance workstation applications. Usage of the *TX6500[™]* and *TX6000[™]* Copper Cabling Systems include:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10000BASE-T (10 Gigabit Ethernet over limited distances as specified in the industry 10GBASE-T standards)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token Ring 4/16
- Digital video and broadband/baseband analog video
- Voice over internet protocol (VoIP)

www.panduit.com

TX6500[™] and *TX6000[™]* Copper Cabling Systems

MINI-COM[®] TX6[™] PLUS Jack Module

Module: CJ688TG*

TX6500[™] UTP Cable

Plenum: PUP6504BU-U**
Riser: PUR6504BU-U**

TX6000[™] UTP Cable

Plenum: PUP6004BU-U**
Riser: PUR6004BU-U**

TX6[™] PLUS Patch Cords

3 feet: UTPSP3***
5 feet: UTPSP5***
7 feet: UTPSP7***
10 feet: UTPSP10***
14 feet: UTPSP14***
20 feet: UTPSP20***

DP6[™] PLUS Flat Punchdown Patch Panels

12 port: DP12688TG
24 port, 1 RU: DP24688TG
48 port, 2 RU: DP48688TG

DP6[™] PLUS Angled Punchdown Patch Panels

24 port, 1 RU: DPA24688TG
48 port, 2 RU: DPA48688TG

GP[™] PLUS Category 6 Punchdown System

See website (www.panduit.com) or catalog for complete system information

Termination Tools

Jack module termination tool: EGJT‡
Wire snipping tool: CWST
Wire stripping tool: CCAST
Panel punchdown tool: PDT110

*To designate a color, add suffix IW (Off White), EI (Electric Ivory), IG (Int'l Gray), WH (White), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), AW (Arctic White), BR (Brown) or VL (Violet). Contact Customer Service for additional colors requiring minimum order quantities.

**For colors other than BU (Blue), substitute with WH (White), YL (Yellow) or IG (Int'l Gray). Contact Customer Service for additional colors requiring minimum order quantities.

***For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to the end of the part number. Contact Customer Service for additional colors and lengths requiring minimum order quantities.

‡Terminates enhanced GIGA-TX[™] Style Jack Module.



MINI-Com® TX6™ PLUS Jack Module

MINI-Com® TX6™ PLUS Jack Module Test Results

Mechanical Test	Test Method	Measurement	Typical Test Results
Normal Force	—	Load (grams)	>100
Vibration	IEC 512-6d	Circuit Resistance (mOhms)	<40
Shock	IEC 512-6c	Contact Disturbance (microseconds)	<5
Durability	IEC 512-9a	Circuit Resistance (mOhms)	<40
Mating/Un-Mating	IEC 512-13b	Mating Force (N)	<20
		Un-Mating Force (N)	<20
Termination Cycles	IEC 352	Number of Cycles	>20

Electrical Test	Test Method	Measurement	Typical Test Results
Low Level Circuit Resistance	IEC 512-2a	Resistance (mOhms)	<20
Dielectric Withstand Voltage	IEC 512-4a	1000 V, 1 minute	Passed
Insulation Resistance	IEC 512-3a	Resistance (mOhms)	>500

Environmental Test	Test Method	Measurement	Typical Test Results
Temperature Life	IEC 512-9b	Circuit Resistance (mOhms)	<40
Humidity	IEC 512-11c	Circuit Resistance (mOhms)	<40
Thermal Shock	IEC 512-11d	Circuit Resistance (mOhms)	<40
Climatic Sequence	IEC 512-11a	Circuit Resistance (mOhms)	<40
Flowing Mixed Gas Corrosion	IEC 512-11g	Circuit Resistance (mOhms)	<40

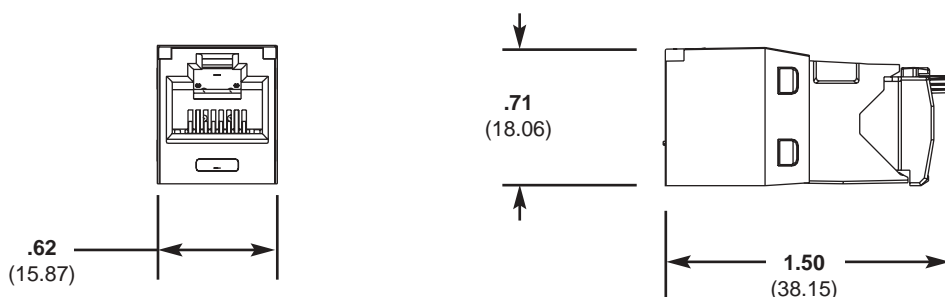

Dimensions are in inches (Dimensions in parentheses are metric).

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of **PANDUIT** product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference **COSP48**

©2005 **PANDUIT** Corp.
ALL RIGHTS RESERVED.
Printed in the U.S.A.

WW-COSP48
10/2005