




JUNCTION BOX

Mini 25-L

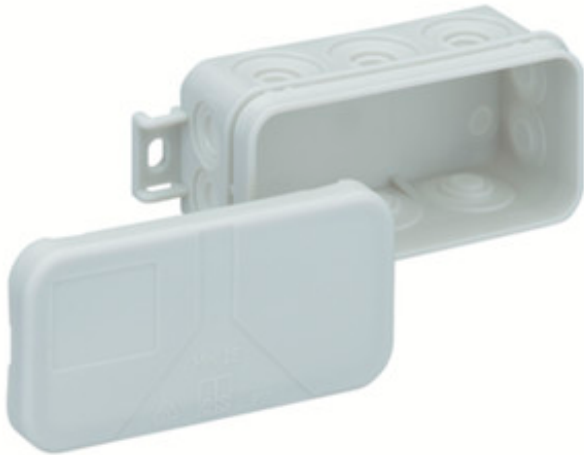

Mini 25-L

Junction box

89 x 43 x 37 mm

Article number: 31090801

Junction box acc. DIN EN 60670 (VDE 0606), 10 entries, 2 floor entries, suitable for confined installation environments such as suspended tool ceilings and cable ducts, complete with perforation tool and blanking plug, with external fixing positions

grey, without terminals, for VDE approved single terminals



Technical data

Measures

Width:	89 mm
Length:	43 mm
Height:	37 mm

Material

Base:	Polyethylene
Cover:	Polypropylene

Other attributes

Color:	grey
Rated cross section:	2,5 mm ²
Tackable:	No
Rated insulation voltage AC:	400 V
Explosion safety:	none
Fire protection:	none

Accessory

VST RR

HandyQuick SQ 52

HandyQuick SQ 32

HandyClip VC 21

HandyClip VC 20

HandyGrip VG 21 w

HandyGrip VG 20 w

HandyGrip VG 21

HandyGrip VG 20

HandyQuick SQ51

HandyQuick SQ81

HandyQuick SQ 31



JUNCTION BOX

Mini 25-L

sealable:	No
Weatherproof:	No
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Ingress protection:	IP55 - acc. EN 60529 / DIN VDE 0470-1
Equiptment:	None

Environmental attributes

Ambient temperature (min.):	-25 °C
Ambient temperature (max.):	40 °C
Ambient temperature (24 h):	35 °C
Max. rel. humidity at 25° C (short Therm):	95%
Max. rel. humidity at 40° C:	50%